

Induction Heating Equipment

Automation and Process Control

Induction heating technologies are frequently used as part of the field joint coating process to raise the temperature of the pipeline surface for coating application. As part of its commitment to advanced process technologies and high-quality field joint coating solutions, Canusa-CPS maintains a comprehensive fleet of specialized induction heating generators and coils in strategic locations in the Americas, Europe, Middle East and Far East, to service both short and long term project rental needs.

Factory Grade™ Automation


- Induction heating equipment is a key element of Canusa-CPS's strategy to deliver Factory Grade™ coating solutions to the onshore and offshore pipeline construction markets. Portable, diesel-powered generators and clamp-style coils are field-friendly versions of their factory counterparts and provide fast, efficient and uniform heating to the field joint coating area in a fully repeatable process from one joint to the next.

Process Control

- The heating process can be precisely controlled by varying the output power of the generator, heating time and clamp coil design to produce a uniform, repeatable heating profile across the surface of the field joint.

High Productivity

- Effective deployment of induction heating equipment can result in higher coating productivity due to quicker heating cycles and consistent performance, joint to joint.

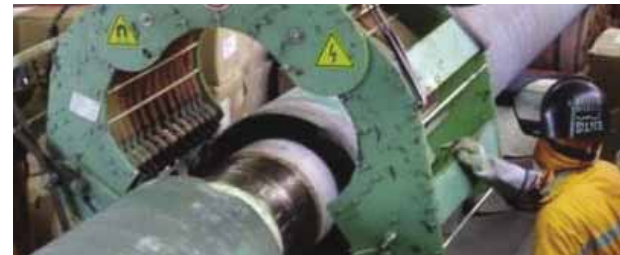

Applications



Oil & Gas



Onshore Pipelines



Offshore, Reel, J & S Lay



High Temperature



Factory Grade



Induction Heating Equipment

Automation and Process Control

Generator Specifications

Property	Units	IHG 120	IHG 350
Output Power (Maximum)	kW	120	350
Operating Temperature	°C	-15 to +45 (-40 on request)	
Engine Type	-	Deutz / Iveco / Cummins	
Cooling System	-	Air / Water	Water
Speed Control	-	ECU Electronic	
Dimensions (L x W x H)	mm	2,400 x 1,100 x 1,800	2,500 x 1,450 x 2,700
Dry Weight	kg	1700	3800
Max Inclination	°	35	22
Noise Level	dB (A)	72	72
Fuel Tank Capacity	L	200	500
Rated Voltage (Maximum)	V	165 (Single Ø)	490 (Single Ø)
Rated Current (Maximum)	A	725	725
Frequency	Hz	400-440	510-570
IP Protection Rating	-	IP22	
Cable Set	-	Standard Length = 10 m	
Remote Control	-	Wired Remote, Standard Length = 15 m	


Typical generator specifications shown.



Coil Specifications

Ø Pipe		Ø Coil	L	LT	W	HL	H	H3
Inches	mm							
4	115	139	870	1,110	860	450	745	570
8	230	244	870	1,220	860	450	850	622
12	315	349	870	1,340	860	450	954	674
16	400	431	900	1,430	860	450	1,037	716
20	500	533	1,002	1,535	860	450	1,138	767
24	610	635	1,104	1,650	860	450	1,240	817
30	760	787	1,256	1,976	860	450	1,393	894
36	915	939	1,409	2,142	860	450	1,545	970
42	1,060	1,092	1,561	2,308	860	450	1,697	1,046
48	1,220	1,244	1,714	2,675	860	450	1,850	1,122
56	1,420	1,447	1,917	2,910	860	450	2,053	1,224

Typical coil sizes shown. Actual dimensions may vary.
Other coil diameters and heating widths available.

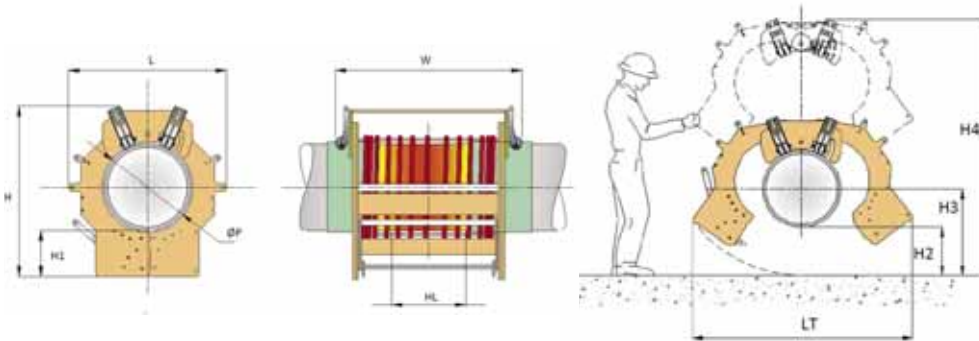

Since 1967, Canusa-CPS has been a leading developer and manufacturer of specialty pipeline coatings for the sealing and corrosion protection of pipeline joints and other substrates. Canusa-CPS high performance products are manufactured to the highest quality standards and are available in a number of configurations to accommodate many specific project applications.

The product information shown here is intended as a guide for standard products.

Consult your Canusa representative for specific projects or unique applications.

Canusa-CPS A division of Shawcor Ltd.

Head Office

25 Bethridge Road
Toronto, ON, Canada M9W 1M7
Tel: +1 416 743 7111
Fax: +1 416 743 5927

Canada

Dome Tower St. 2200, 333-7th Avenue SW
Calgary, AB, Canada T2P 2Z1
Tel: +1 403 218 8207
Fax: +1 403 264 3649

Americas

5875 N. Sam Houston Pkwy W., Suite 200
Houston, TX, USA 77086
Tel: +1 281 886 2350
Fax: +1 281 886 2353

Middle East

Plot # 37-WR43, Sector no.: ICAD III
Musaffah South, PO Box 2621
Abu Dhabi, The United Arab Emirates
Tel: +971 2 204 9800

Europe, Africa & Russia

Dellaertweg 9-E, Gebouw "Le Carrefour"
2316 WZ Leiden, The Netherlands (NL)
Tel: +31 71 80 802 70
Fax: +31 71 80 802 71

Asia-Pacific

101 Thomson Road, #11-03 United Square
307591 Singapore
Tel: +65 6749 8918
Fax: +65 6749 8919

Quality Management system registered to ISO 9001

Canusa warrants that the product conforms to its chemical and physical description and is appropriate for the use stated on the product data sheet when used in compliance with Canusa's written instructions. Since many installation factors are beyond our control, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection therewith. Canusa's liability is stated in the standard terms and conditions of sale. Canusa makes no other warranty either expressed or implied. All information contained in this data sheet is to be used as a guide and is subject to change without notice. This data sheet supersedes all previous data sheets on this product. E&OE

PDS_Induction_Heating_Equipment_rev010